



## EASY LITE HEAT-ASSISTED TOP ROLLER LAMINATOR

Professional heat-assisted top roller laminator for self-adhesive materials. It allows to laminate and mount.  
Designed to be reliable and easy-to-use for excellent and high quality results.

### ✓ WORKING FLEXIBILITY

It mounts images on panels, applies double-sided adhesive films, application tape and protective film

### ✓ RICH ON ACCESSORIES

Tools to improve your work performances and boost overall process (i.e. motorized lifting, cutting unit to trim and laminate and more)

### ✓ EASY TO USE CONTROL PANEL

User friendly control panel to set working parameters

### ✓ INTUITIVE PRESSURE CONTROL

Intuitive **LED display** that guarantees the correct working pressure avoiding the waste of material

### ✓ COST-EFFECTIVE

Very good quality, price and performance

### ✓ TIME SAVING

**Easy adjustments** of the media thanks to the swing-up steel feed table and the ergonomic position of the shafts

### ✓ EASY TO USE


Ideal for small and medium sized user.  
Compact dimensions, light and easy to move

### ✓ MADE IN ITALY

Designed and manufactured completely in Italy

### SUITABLE FOR:

- > Floor graphics / window graphics / Backlit display
- > Trade shows graphics
- > Roll-up banners / Pop-up / Stickers
- > Rigid boards and flexible media
- > Table top displays
- > Car wrapping
- > Membrane keyboards / Pre-spaced stickers
- > Many more..

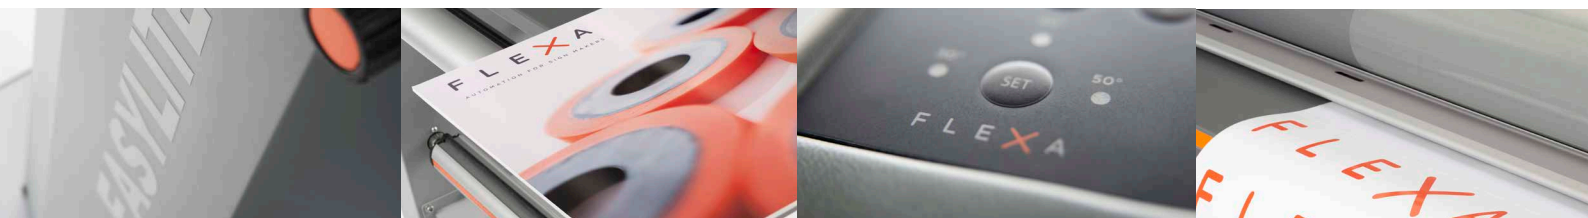



Motorized lifting of the upper roller (optional)



Roller pressure display



Millimeter scale on each shaft for the right positioning of the media



Aluminum shafts with automatic locking system



Swing-up steel feed table for quick set-up



Front tray for prints (optional)



Feed-in guide (optional)

	EASY LITE 110	EASY LITE 160
Working width	1100 mm (43 in)	1600 mm (65 in)
Max. space between rollers	30 mm (1,2 in)	30 mm (1,2 in)
Coated rubber rollers	Ø 116 mm (4,6 in)	Ø 116 mm (4,6 in)
Heated upper roll preset	30°, 40°, 50° C	30°, 40°, 50° C
Max. speed	5 m/min (16 ft/min)	5 m/min (16 ft/min)
Working height	900 mm (35 in)	900 mm (35 in)
Power supply	230 V - 50 Hz - 2000 W	230 V - 50 Hz - 2400 W
Dimensions (W x D x H)	1500 x 650 x 1500 mm (59 x 26 x 59 in)	2000 x 650 x 1500 mm (79 x 26 x 59 in)
Weight	175 kg	215 kg (474 lbs)
Packing Dimensions (W x D x H)	2150 x 850 x 1700 mm (85 x 33 x 67 in)	2150 x 850 x 1700 mm (85 x 33 x 67 in)
Packing Weight	200 kg (440 lbs)	260 kg (573 lbs)

Distributor

Manufactured in compliance with CE regulations



Follow us:



100% Made by FLEXA  
100% Made in Italy

